

DEMA MODEL 68-4 FISHER, CHICAGO, AND T & S FAUCET ADAPTER KIT

1. PARTS:



Model: 68-4

- A. (1) 6' Long Hose - Male Garden Hose x Plain End. P/N 44-3-6LFC
- B. (1) Manifold Assy. P/N 68-4-6
- C. (1) Rubber Washer. P/N 150-6
- D. (1) Hose Clamp. P/N 76-2-2
- E. (2 ea.) Fisher, Chicago, T&S Faucet Adapters.
- F. (1) Rubber Washer, Chicago adapters.*** P/N 150-7

		Model: 68-4-1A Contains Items A. thru D.
Model: 68-4-2 Contains Items A. thru D. and (2 ea.) Fisher Adapters	Model: 68-4-3 Contains Items A, B, D, and F (2 ea.) Chicago Adapters	Model: 68-4-4 Contains Items A. thru D. and (2 ea.) T&S Adapters
Model: 68-4-2A Contains Item C and (2 ea.) Fisher Adapters	Model: 68-4-3A Contains Item F and (2 ea.) Chicago Adapters	Model: 68-4-4A (regular) Model: 68-4-7A (large*) Contains Item C and (2 ea.) T&S Adapters
Model: 68-4JG Contains Items B (68-4-6JG), C, D, E, and F		

* 68-4-7 and 68-4-7A are for the large institutional size sinks that the regular T&S faucets will not fit.
 ***150-7 is to only be used with Chicago style adapters.

2. INSTALLATION:


This product is designed only to be used as described in this instruction sheet. Adhere to all warnings and cautions identified in this document.	
	WARNING: Installations must conform to all local and national plumbing codes and use approved backflow prevention and pressure relief devices where required. ALWAYS DISCONNECT DISPENSER FROM WATER SOURCE WHEN DISPENSER IS NOT IN USE.
	Always read SDS for all chemicals used and follow personal protective guidelines.

Remove the spout from the faucet and tighten the manifold assembly onto the faucet using a rubber sealing

washer. Next, attach the spout to the top of the manifold assembly and push the hose and clamp onto the male hose barb. Tighten the hose clamp and attach the other end of the hose to the blend center.

NOTE: Do not remove the o-ring from under the sink spout.

DEMA MODEL 68-4 FISHER, CHICAGO, AND T & S FAUCET ADAPTER KIT

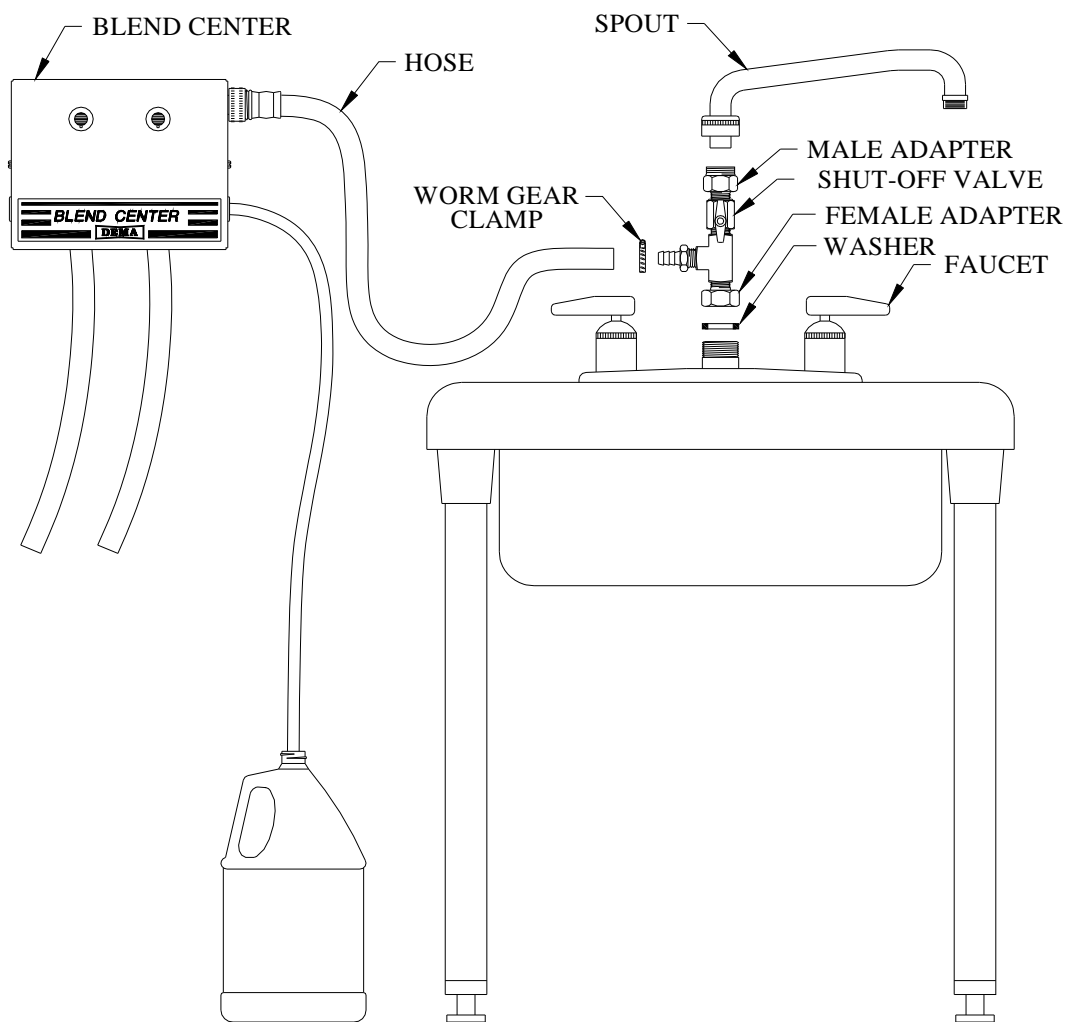

RETURNS: NO MERCHANDISE MAY BE RETURNED FOR CREDIT WITHOUT DEMA'S WRITTEN PERMISSION. RETURN MERCHANDISE AUTHORIZATION NUMBER REQUIRED IN ADVANCE OF RETURN.

WARRANTY:

DEMA products are warranted against defective material and workmanship under normal use and service for one year from the date of manufacture. This limited warranty does not apply to any products which have a

normal life shorter than one year or failure and damage caused by chemicals, corrosion, improper voltage supply, physical abuse, or misapplication. Rubber and synthetic rubber parts such as "O"-rings, diaphragms, squeeze tubing and gaskets are considered expendable and are not covered under warranty. This warranty is extended only to the original buyer of DEMA products. If products are altered or repaired without prior approval of DEMA, this warranty will be void.

Defective units or parts should be returned to the factory with transportation prepaid. If inspection shows them to be defective, they will be repaired or replaced without charge, F.O.B. factory. DEMA assumes no liability for damages. Return merchandise authorization number, to return units for repair or replacement, must be granted in advance of return.